



Hegewald & Peschke

Meß- und Prüftechnik GmbH

Product information

Universal testing machine inspekt 1200 kN



Hegewald & Peschke, Meß- und Prüftechnik GmbH
Am Gründchen 1, 01683 Nossen, Germany
Telephone: +49 35242 445-0, Telefax: +49 35242 445-111
E-Mail: info@Hegewald-Peschke.de
<https://www.Hegewald-Peschke.com>



Solid construction for highest measuring and control precision

- 4 guiding columns and 2 backlash-free precision ball screws
 - Precise force transmission
 - High lateral force stability
 - Increased axial stiffness
- Robust design with casing and bellow cover
 - Low maintenance needs
 - Also for use in harsh production environments
- Modern Harmonic Drive® technology coupled with powerful AC drive
 - Optimized control behavior due to low-backlash transmission
 - Increased test speeds
 - For static material testing as well as for alternating and continuous loading

Flexible design for versatile applications

- Widened working area and 2 test rooms (vertical); optional lateral test room
 - Different testing tasks without modification of the testing tools
 - Material and component testing
- Connection of peripheral devices (e.g. ovens, temperature chambers) and additional measuring and control channels possible

Our testing machines speak your language: LabMaster - the testing software from Hegewald und Peschke

- User-friendly usage concept
- Complete software including all test modules (tensile, compression, bending, peel test) without additional costs
- Universally applicable: simple and complex test procedures: standard-compliant and customer-specific
- High flexibility for integration of external devices, data import and export as well as free configuration of test procedures



Innovative control electronics for maximum measurement resolution & extensive functionality

- High modularity and control precision
- Adaptive controller
- High-quality signal converters for maximum resolution
- Standard functions:
 - Force, displacement, strain control
 - Overload protection
 - Automatic sensor identification incl. calibration data storage
 - Specimen break detection
 - Return function
 - Manual positioning via hand panel or our testing software LabMaster

Highest safety with maximum operating convenience

- CE-compliant protective housing optionally available for every application
- Sustainable: capable for cost-efficient and application-oriented updates/upgrades
- Stable and vibration-damped: large machine feet allow leveling as well as installation without foundation and increase stability




Technical data:

| | |
|--|--|
| Nominal load | Main working room: 1200 kN, test room above the moving crosshead: 50 kN |
| Mechanical structure | 2 backlash-free precision ball screws, 4 hardened guide columns - with spindle protection, drive via AC servo motor |
| Stiffness of the test frame (incl. deformation of load cell and tool adapter) | 750 kN/mm |
| Test speed | 0.0001 – 250 mm/min (optionally expandable) |
| Resolution of crosshead travel measurement | <0.05 µm |
| Force measuring range | Class 1 (optionally class 0.5) from 0.1 - 100 % of the nominal load depending on the load cell used (according to DIN EN ISO 7500-1, ASTM E4) |
| Measuring, control and regulating electronics | Load and traverse path channel integrated 3 additional free slots for data acquisition cards for additional control channels available (optional expandable to 7 slots) |
| Data transmission | Ethernet (LAN) or USB, 50 Hz (standard), optionally higher data acquisition frequency |
| Electrical connection | 3NPE/400 VAC/ 50 Hz / (TN-net) 12.0 kVA, preliminary fuse 35 A, 4 m of cable for termination, 5-40°C, 20-80% humidity |
| Main test tool connection | M72x4 or LK250-12xM30-IG |
| Scope of delivery | Testing machine with measurement and control electronics, hand panel with force-displacement display for manual positioning & setup operation |
| Options necessary for operation: | Load cell, clamping tool/testing tool, adapter set, LabMaster user software, PC (current standard), Windows® operating system |

Dimensions in [mm]/weight:

| | Standard 10-x05-902 | Extended 10-x05-922 |
|---|------------------------|------------------------|
| H (height) | 3160 | 3660 |
| H test (test room height) | 1710 | 2210 |
| H max (max. test stroke without test tools, adapter and load cell) | 1460 | 1960 |
| B (width) | 1860 | 1860 |
| B absolut (width with control) | ca. 2500 | ca. 2500 |
| B test (test room width) | 880 | 880 |
| Depth | 1250 | 1250 |
| Weight | 6500 kg | 7000 kg |

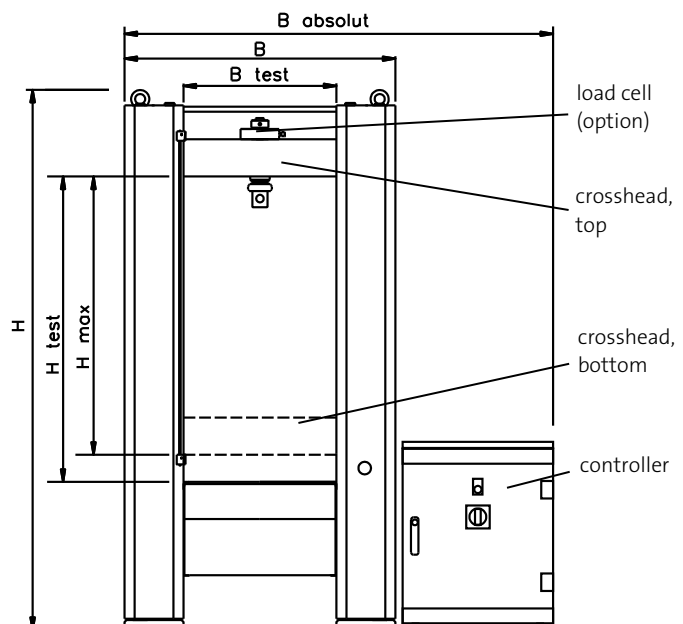

Further options:

- Temperature control equipment (e.g. ovens, temperature chambers) [Fig. 1].
- Clip-on extensometers, long-distance extensometers, optical extensometers [Fig. 1, 2, 3]
- Protective devices [Fig. 3, 4]
- Multiple test rooms: lateral or above the moving crosshead [Fig. 1, 5]
- Increased test speed
- Modified moving crosshead:
 - with load cell shifting unit for test applications outside the standard test axis
 - for mounting several load cells side by side
- Extensive range of accessories (e.g. T-groove plates)
- Different test room heights/widths

