




## 42-200-200 Mobile impact tester for pipes - FW R 1000

### Standards

ASTM G14, DIN 30 670, DIN 53 373, DIN EN 12068

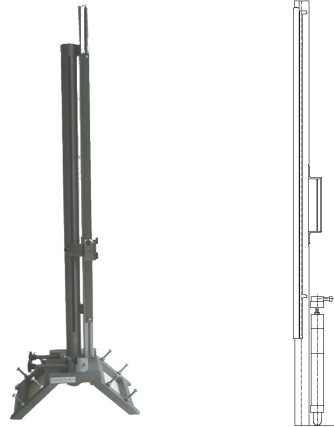

*For illustration only*

### Application

Mobile impact tester for testing the impact strength of pipe coatings

### Features

The manually operated impact tester is a stainless steel construction consisting of a slotted pipe with a scale. The falling height can be adjusted infinitely up to 1000 mm with an accuracy of 1 mm. Thus, the impact energy can be adjusted gradually. A standard falling bolt ( $\varnothing$  25 mm) and a standard set of weights falling masses belong to the scope of delivery. Falling bolts with different diameters and weights according to the required standards are available.

### Technical Data

Falling height	up to 1000 mm
Scale reading precision	1 mm
Falling bolt diameter	25 mm (standard falling bolt, 1000 g)
Max. falling weight	5000 g
Falling masses	2 x 500 g, 1 x 1000 g, 1 x 2000 g



DIN EN  
ISO 9001



Deutsche  
Akkreditierungsstelle  
D-K-15093-01-00  
IEC 17025



### Dimensions and Connection

Dimensions (WxDxH)	approx. 100x100x1000 mm
Weight	approx. 15 kg
Mains	n.a.
Power	n.a.
Interfaces	n.a.
Air	n.a.
Cooling	n.a.
Others	n.a.

### Accessories

incl.	Articlenumber	Description
-	42-200-201	Prism for impact tester
-	42-208	Adapter for small pipes (needs 42-200-201)
-	42-202-004	Falling bolt 15 mm diameter
-	42-202-002	Falling bolt 16 mm diameter
-	42-202	Falling bolt 20 mm diameter
1	42-203	Falling bolt 25 mm diameter
-	42-207	Set of weights for mobile impact tester FW R 1000 (1x50 g; 1x100 g; 1x200 g; 1x250 g; 1x400 g)